

德國黑騎士金屬鉸鍊緩衝器



Application for
 Silent System hinge cup screw-on door buffer



Silent System screw-on buffer for hinge cup	060 581	
Hinge	Cranking	Cup version
Intermat Top <i>exclusive</i>	0 mm	T22 / T23
Intermat 9943	0 mm	T42 / T43
Intermat 9944	0 mm	T42 / T43
Intermat 9936	0 mm	T42 / T43



Article


Silent System screw-on door buffer for hinge cup 金屬鉸鍊緩衝器

Assembly 組裝方式

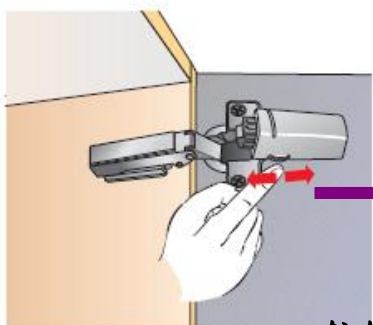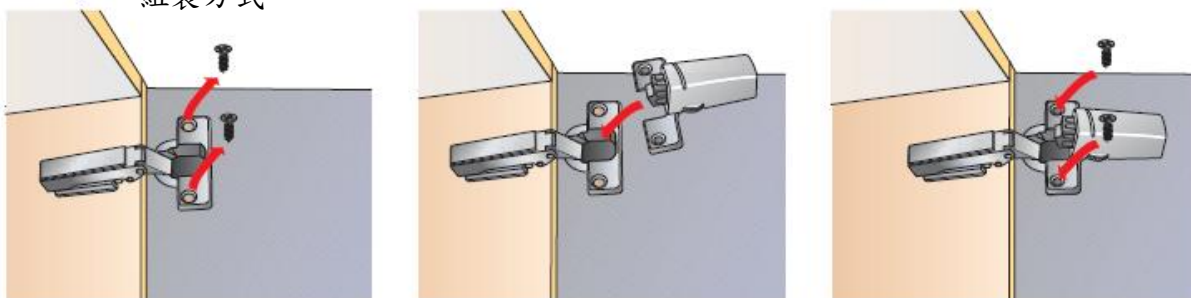

順時鐘往前緩衝力量加重
 逆時鐘往後緩衝力量減輕

鉸鍊緩衝器請安裝於門板下方

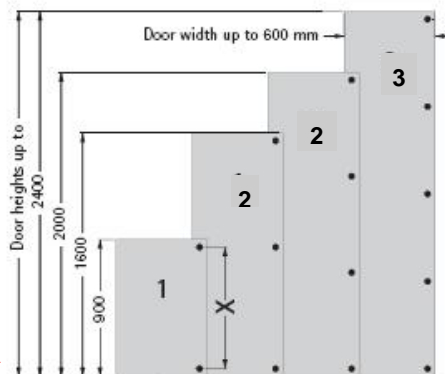

鉸鍊緩衝器安裝數量

(當使用 19mm 厚塑合板, 比重 750kg/m³ 時)